


# Anchor Bolts

Cat. No.	Bolt Diameter 'ABD'	Nominal Length 'ABL'	Formed Length 'FL'	Anchor Bolt Projection 'ABP'	Hook Length 'HL'	Embedment 'EMB'	Threads Per Inch TPI
SSW-SAB-5/8X18	5/8"	18"	16 1/4"	2 1/2"	3"	13 3/4"	11"
SSW-SAB-3/4X24	3/4"	24"	22 1/2"	3"	3"	19 1/2"	10"
SSW-SAB-7/8X30	7/8"	30"	28 3/4"	3"	3"	25 3/4"	9"
SSW-SAB-1X34	1"	34"	32"	4"	4"	28"	8"
SSW-SAB-1 1/4X48	1 1/4"	48"	45 1/2"	5"	5"	40 1/2"	7"

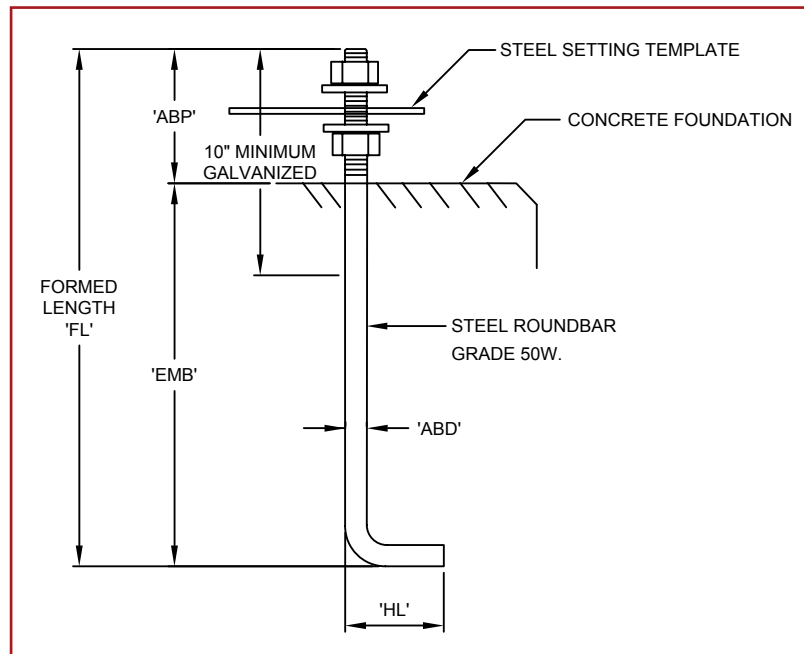

1. ANCHOR BOLTS ARE THREADED FROM BAR STOCK CONFORMING TO CSA G40.21-98 GRADE 50W.
2. ANCHOR BOLTS ARE SUPPLIED WITH 2 HEAVY HEX NUTS AND 2 FLAT WASHERS. GALVANIZED.
3. GALVANIZED FINISH SHALL CONFORM TO ASTM A 123.
4. ANCHOR BOLTS REVIEWED FOR DIAMETER ONLY.
5. FOUNDATION BY OTHERS.
6. ENSURE ANCHOR BOLTS ARE TIED AT BOTTOM TO DEVELOP TENSILE CAPACITY.
7. ANCHOR BOLTS SHALL BE PRE-TENSIONED USING THE TURN OF THE NUT METHOD. REFER TO CSA S6-00 CHBDC. ANCHOR BOLTS SHALL BE 1/6 TURN BEYOND TIGHT.